



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.

**FIELDS OF APPLICATION**

Office & Education, offices, open-plan offices, conference rooms, conference rooms, reception areas, counters, galleries, hotels, restaurants, living spaces

IEC 62717 LED-modules for general lighting – Performance requirements  
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy 115lm/W

Body - Die cast aluminum housing with solvent free powder coating

Diffuser - PMMA polycarbonate pattern lens.


Glowing Wire Test - 850°

Temperature - ta=20 °C ~ ta max=50 °C

Class - III

Model --- **EVA -**

**7** years Standard Guarantee  
Guarantee




**A - Ø 85-68mm**

**B - Ø 85-79mm**

**C - Ø 85-97mm**

**D - Ø 85-112mm**

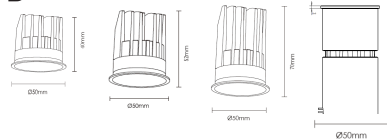

Default Available

**EVA-A-0-15-27-W-6W-IP20**



Product Assistant Chart

<b>EVA-</b>	X X X X X	Size	A	B	C	D			
		Driver	0	1	2	3	4	5	
			On/Off	Dali	Dimmable	Phase Dimming	1-10	0-10	
		Beam Angle	15°	24°	36°	36°			
		Kelvin	27	30	40	50	60		
			2700K	3000K	4000K	5000K	6000K	RGBW TUN	
		Finishing	W	B					
		white	black						
Wattage		4W	6W	8W	10W	12W	15W	18W	20W


Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.

IP-20 IP-44 COB McA Step 3 220~240V










**Relative spectral perception of brightness and melanopic effect**

Effect as a percentage

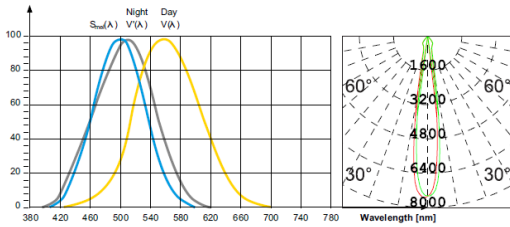

Explanation of the three curves:  
V(A) = Perception of brightness, daytime seeing with the cones  
V(A) = Nighttime seeing with the rods  
S\_w(A) = Melatonin suppression with the photosensitive ganglion cells



LED life time		Operating time 1.000 h										
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99



LED



series wiring



LM-80



FLICKER FREE